


MotherBoard ECS K7SEM

Generalidades

- > SiS® 730S Chipset
- > Socket A for AMD® Athlon/Duron (K7) processors
- > Max memory: 1.0GB
- > Support External (4X) & Internal AGP (4X)
- > RealTek 8139C LAN Chip on board
- > AC97 Audio Codec on board

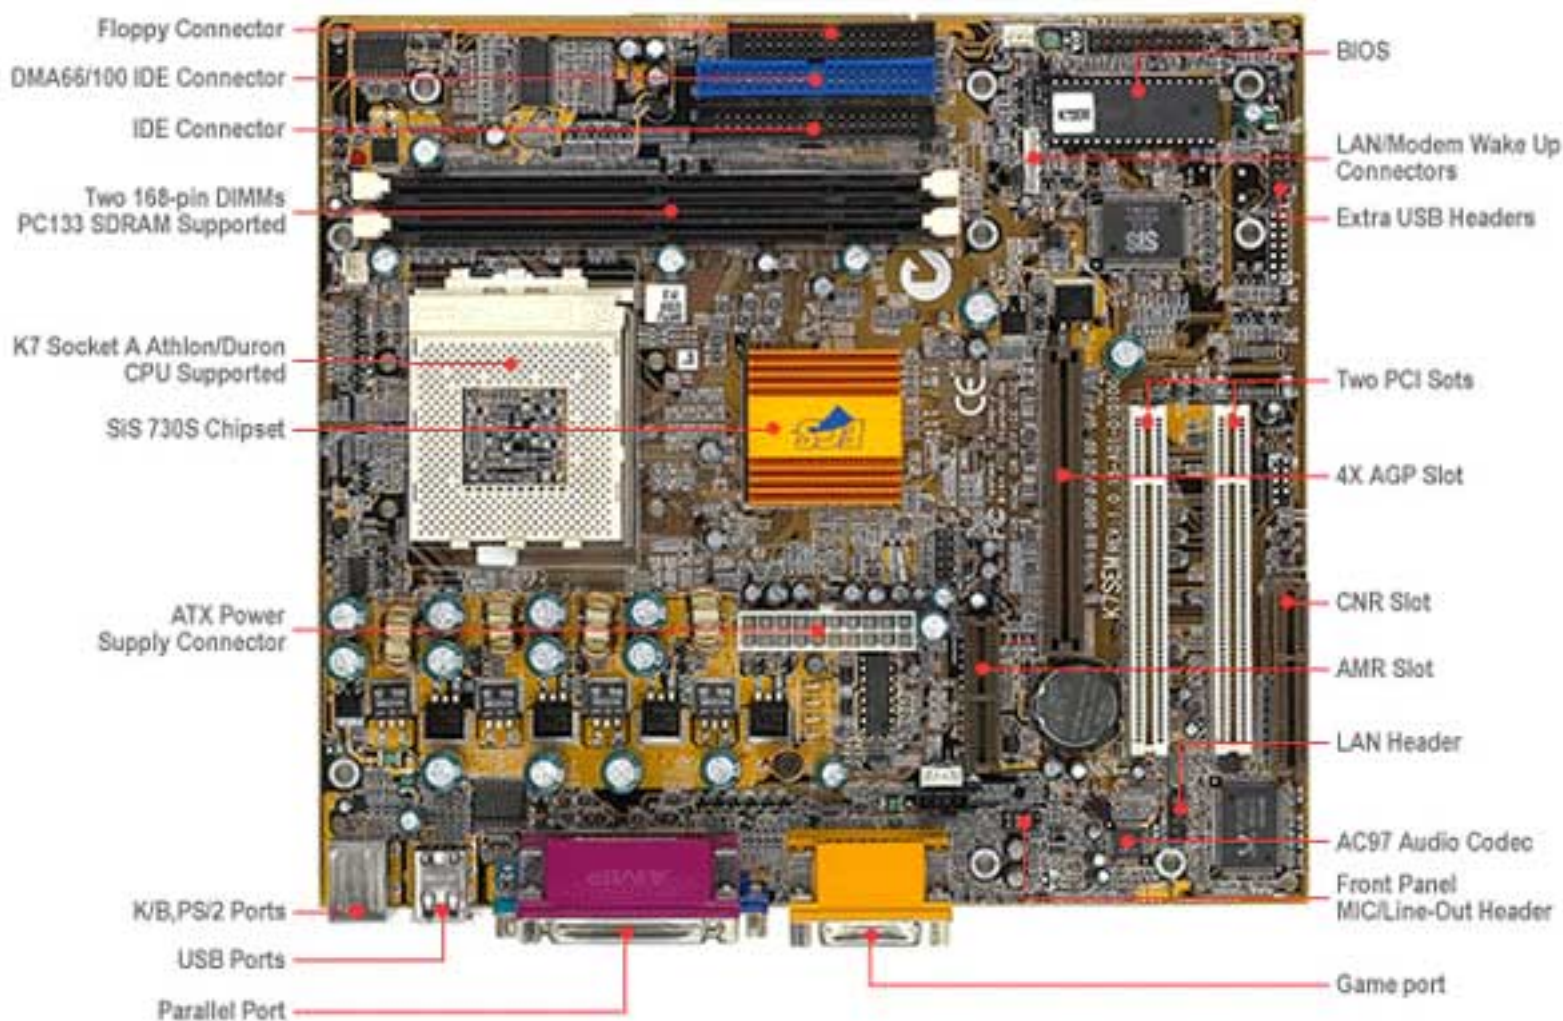

Especificaciones

PROCESSORS

- > AMD® Athlon/Duron (K7) processors
- > Full series of Athlon/Duron CPU including the future Athlon processors.

CHIPSET

- > SiS® 730S
- > Support AGP 2.0 specification
- > Integrated 4X AGP in SiS® 730S
- > Simple LPC I/O - SiS®950/ITE8705
- > System Hardware Monitor: Integrated in SiS®950/ITE8705
- > LAN: RealTek 8139C
- > AC97 Audio Codec
- > Compliant with AC97 2.1 specification

MEMORY

- > Two 168-pin DIMM sockets for 3.3V SDRAM (Ready for PC100, PC133)
- > Maximum: 1.0GB

SYSTEM BIOS

- > Award 2MB Flash EEPROM
- > Supports Plug and Play 1.0a, AMP 1.2, Multi Boot, DMI
- > Full Support for ACPI revision 1.0 specification

FORM FACTOR

- > MicroATX (244mm x 220mm)

EXPANSION SLOTS

- > 2 PCI slots, 1 AGP slot, 1 AMR slot, 1 CNR slot

RTC & BATTERY

- > SiS® 730S included 256 bytes of CMOS SRAM
- > With CMOS SRAM hardware clear jumper

I/O INTERFACE

- > Supports Plug and Play function
- > PS/2 keyboard and PS/2 mouse connectors
- > Six USB Ports (Two USB Connectors as header onboard)
- > One - EPP/ECP mode parallel port
- > One - 16550 high-speed serial I/O ports
- > One VGA Connector
- > Audio Ports (Line-in, Line-out, Mic-in, CD-in and game port)
- > Dual PCI IDE interfaces - support four IDE devices (PIO mode 4, DMA Mode 2, Ultra DMA 33/66/100)
- > Supports 360K~2.88M Byte, 3 Mode FDDs or LS120

-
- > ATX Power Supply Connector
 - Ports, Headers and Others:
 - IrDA header
 - Extra USB header
 - Front Panel MIC/Line-out header
 - LAN header
 - Green, HDD, Power indicator LED headers
 - CPU and Case Fan headers
 - LAN Card Wake Up / Modem Ring Wake Up header